



EDGE[™] **13** SERIES

Compliant LED UV-A Flood Lamp

MEETS

EN ISO:3059

Specifications

EDG-13HC

High-intensity **ASTM E3022-18** compliant broad-beam flood lamp for overhead nondestructive testing inspections.

P65 RATED NDT Inspection **Dust Tight &** Screening of Water Resistant Booths **Fluorescent Particles EASILY MOUNTABLE** FLEXIBLE ARM ····· For overhead inspection or For mounting at specific in-line applications angles FANLESS ⁻ Cool running design that uses state-of-GANGABLE the-art heat sinks Can be ganged together to provide an even wider coverage area **THERMAL CUT-OFF** CIRCUITRY Prevents lamp from going out of compliance when internal temperature exceeds specifications INTEGRAL **UV-A PASS** FILTERS Reduce visible wavelengths LONG-LASTING **13** UV-A LEDS **UV-A LENSES** Provides large area of coverage Virtually eliminate **CERTIFICATE OF** clouding/solarization for the largest, most even overhead beam available CONFORMANCE included with each lamp

EDGE[™] 13 SERIES EDG-13HC


MODEL	NOMINAL STEADY-STATE UV-A (365 nm) INTENSITY at 15 in (38 cm) •	VISIBLE LIGHT MEASUREMENT	UV-A COVERAGE AREA (at minimum 1,000 μW/cm²)	1 wav		Page 1 of 6 REAL INFINITION
				APPARATUS 6.0	MANUFACTURER	MODEL NUMBERS
EDG-13HC		< 1 foot-candle (11 lux)	24 x 22 in (61 x 56 cm)	UV-A/Visible Meter (5.1)	Spectronics Corporation	AccuMax XRP-5000* (aperture width 0.5 in.)
	8,500 µW/cm ²			Spactronafiameter (6.2)	StellarNet	LIVEST-25, MR 3-25
	0,000 µw/cm			- Andrew Control of the Andrew Control of th		
				LAMP ACCEPTANCE TEST (8.3)	Domicronents	At Applicate THE (3) (1)
				Notice and Articles of the	At 15 inches (16 cm)	(Stabilization, 15 min)
					Min range 100-400mm	See Figure 1.0 - Pp. 2
Light Source:	(12) LIV_A (265 m	(13) UV-A (365 nm) LEDs			Still to 370mm	-
Light Source.	(13) UV-A (303 III	(13) 0V-A (303 IIII) LED3			s15nm	am
				Longest Workleigth at Half Management (25.6.4.3) 10.6 (70 Visible Measurement (555am) at	<377mm <2.1c.(21.Lus)	re(Lu
Lamp Style:	Panel flood lamp	anel flood lamp		15 in. (58cm)		
Length: (L x W >	(H) 11 x 14 x 9 in (28	11 x 14 x 9 in (28 x 36 x 23 cm)				
Weight:	14 lb (6.4 kg)	14 lb (6.4 kg)				Alasyony Alasyony
worgin.	14 ID (0.4 Kg)	(0. + Kg)				
Power Requirer		AC power (main AC power cord supplied with the unit) (Available in 100-120V, 230V and 240V versions)			-	NULINE - MARAGENTIN
					NKINE 514-353-4040 + FAX-534-	333-4850 •

For applications requiring extremely large coverage area, the EDGE[™] 13 can be quickly ganged together.


*Optional accessory: ganged cables with connectors (130156)



UV-A Beam Profiles

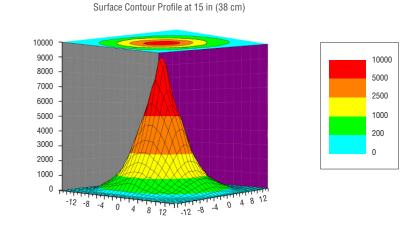

Top Intensity Profile at 15 in (38 cm)





DISTRIBUTED BY:



800-900-9097 info@NDTUnlimited.com www.NDTUnlimited.com