

Ideal for:



NDT INSPECTION BOOTHS



FLUORESCENT PENETRANT AND MAGNETIC PARTICLE INSPECTION



WASH STATION INSPECTION




SCREENING OF FLUORESCENT PARTICLES

ROCKER SWITCH

Easily switched between UV & White Light

MOUNTABLE

For overhead inspection or in-line applications

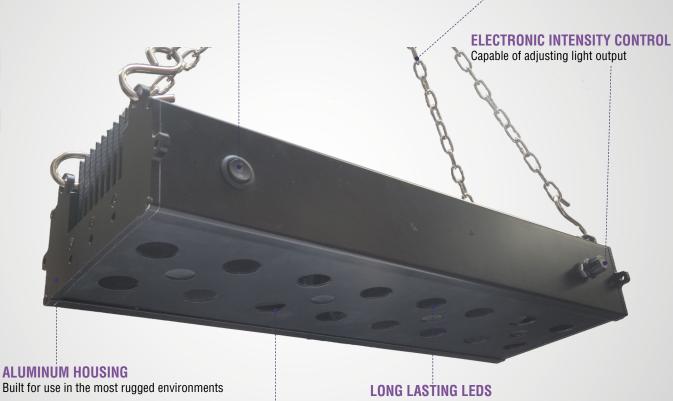

INTEGRAL UV-A PASS FILTERS

Reduce visible wavelengths

MODEL	NOMINAL STEADY-STATE UV-A INTENSITY WITH FILTER at 15 in (38 cm) ①	UV-A COVERAGE AREA at 15 in (38 cm) at minimum 1,200 μW/cm²	WHITE LIGHT INTENSITY	VISIBLE LIGHT MEASUREMENT
PM-16B	6,500 μW/cm ²	23.6 x 10.63 ln (60 x 27 cm)	>325 foot-candle (>3500 Lux)	<1 foot-candle (<10 lux)
PM-32B	6,500 μW/cm ²	43.3 x 10.63 ln (110 x 27 cm)	>325 foot-candle (>3500 Lux)	<1 foot-candle (<10 lux)

	PM-16B	PM-32B	
Light Source:	16 UV-A LED'S & 4 White LED'S	32 UV-A LED'S & 8 White LED'S	
Lamp Style:	Panel Flood Lamp	Panel Flood Lamp	
Length:	19.1 in (48.5 cm)	37.8 in (96 cm)	
Width:	6.7 in (17 cm)	6.7 in (17 cm)	
Height:	3.94 in (10 cm)	3.94 in (10 cm)	
Weight:	16.5 Lb (7.5 Kg)	34.1 Lb (15.5 Kg)	
Intensity Control:	From 10% - 100%	From 10% - 100%	
Power Requirements:	100V - 264V, 50-60 Hz	100V - 264V, 50-60 Hz	


PowerMAX™ 365 UV-A LED Panel Flood Lamp Kit

Comes complete with PowerMAX[™] 365 UV-A LED Panel Flood Lamp, Power Cord, Chain and Hooks.




PowerMAX™ 365 PM-32B

UV-A Beam Profiles









-8500 -7500 -6500 -5500 -4500 -3500 -2500 -1500 -500 -PM-16B


9500



Top Intensity Profile at 15 in (38 cm)









www.Spectro-UV.com 4 Dubon Ct., Farmingdale, NY 11735 866-230-7305



DISTRIBUTED BY:

800-900-9097 info@NDTUnlimited.com www.NDTUnlimited.com